


TECHNICAL SPECIFICATION



EVOSpec® Safety Eyewear

Clear / ANT010-200-000

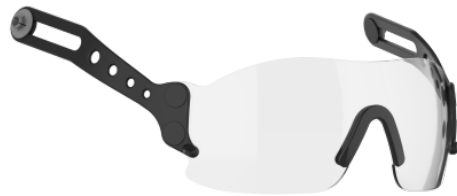

DESCRIPTION

Retractable polycarbonate eyeshield for use with JSP EVO® helmets. EVOSpec® is available in clear and smoke lens options, offering protection against harmful light and low energy impact. Simple to fit to a new or existing EVO® helmet, EVOSpec® ensures safety eyewear is always available and protected from damage.

OPTIONS

Clear (ANT010-200-000)

Smoke (ANT120-200-000)

SAFETY STANDARDS

EN 170 • EN 166 • ANSI Z87. 1



JSP Limited, Worsham Mill, Minster Lovell, Oxford OX29 0TA, England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: sales@jsp-safety.com / Web: www.jsp-safety.com

Do Not Publish without written permission from JSP Limited. Contact copyright@jsp-safety.com. Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 1 of 2 / Issued 24 Nov 2022 / Copyright 2018 - 2022. JSP Limited. All Rights Reserved.



SPECIFICATIONS



RADIATION PROTECTION BREAKDOWN filtering effect
Scale Number
2C



LIGHT TRANSMISSION BREAKDOWN Lens Shade number
1.2



Manufacturer's Trademark
JSP Dagger



Optical Class (1 – Class 1 – High quality for regular use. 2 – Class 2 – Medium quality for occasional use. 3 – Class 3 – Low quality for exceptional use)
1



Low Energy Impact resists a 6 mm, 0.86g ball @ 45 m/s °
Maximum protection for glasses
F



The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures. (-5°C and +55°C) Optional
T



Resistance to fogging (optional)
N

FEATURES



Retractable

Ensures safety eyewear is available when required, never lost, and protected from damage when retracted within helmet shell.



Easy Assembly

Quick and simple to fit to existing EVO® helmets.



Lens Options

EVOspec® is available in clear and smoke lens options, offering protection against UV light or UV and sunglare, in addition to protection against low energy impact.

RANGE



VIDEOS

youtu.be/LdxMNctXLbg

DOWNLOADS

[Image Pack \(ZIP\)](#)

[doc-evospec-updated-nb2797.pdf \(PDF\)](#)



JSP Limited, Worsham Mill, Minster Lovell, Oxford OX29 0TA, England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: sales@jssafety.com / Web: www.jssafety.com

Do Not Publish without written permission from JSP Limited. Contact copyright@jssafety.com. Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 2 of 2 / Issued 24 Nov 2022 / Copyright 2018 - 2022. JSP Limited. All Rights Reserved.

